


BCD108-EVS

BCD Enterprise 1U 8-Bay Rackmount Multi-Purpose Server







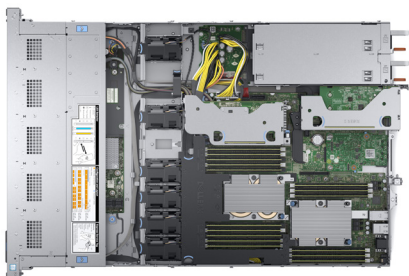

1U ENTERPRISE SERVER, OPTIMIZED FOR HIGH PERFORMANCE APPLICATION PROCESSING

The BCD108-EVS delivers purpose-built performance for enterprise IP video surveillance applications. The 1U, 2-socket video server allows the use of SSDs, SATA, and dual-port SAS drive technology.

With up to (2) Intel® Xeon® Scalable processors and 16 DIMM slots, this server delivers high throughput and is ideal for high-intensity workloads. Optimize I/O with dual OS SSD drives and fast-spinning, high-performing SAS drives. Redundant power ensures high system availability, guaranteeing reliability in any deployment.



KEY FEATURES

-  Up to 160TB of Raw Storage
-  Intel® Xeon® Silver 4216 Scalable Processors
-  Windows Server 2019
-  iDRAC Express
-  SSD, SAS & SATA Drives
-  Redundant Power
-  RAID Options 0, 1, 5, 6, 10
-  5-Year Keep Your Hard Drive Warranty

harmonize Bridge
POWERED BY TIGER TECHNOLOGY
Inside

FOR MORE INFORMATION: bcdvideo.com | sales@bcdinc.com | +1.888.305.4993

TECH SUPPORT: support@bcdinc.com

BCD108-EVS R2.0 Copyright © 2022, BCD. All rights reserved. This document is provided for information purposes only.

Intel, the Intel logo, the Intel Inside logo and Xeon are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries.

BCD108-EVS

BCD Enterprise 1U 8-Bay Rackmount Multi-Purpose Server

SYSTEM

Operating System

Windows Server 2019

Memory

Single Processor: 16GB (2x 8GB)
Dual Processor: 32GB (4x 8GB)
Maximum Configuration: Up to 1TB LRDIMM
(16x DDR4 DIMMs Slots)

Processor(s)

Up to (2) Intel® Xeon® Silver 4216 Scalable Processors (16 Cores, 32 Threads, 3.20GHz)

Processor Passmark

Intel® Xeon® Silver 4216: 18,561
Dual Intel® Xeon® Silver 4216: 26,171

Networking

Single Processor Models: (2) 1GbE RJ45 Ports
Dual Processor Models: (2) 1GbE RJ45 Ports,
(2) 10GbE SFP+ ports

Expansion Slots

Single Processor: (1) PCIe x16 full-height
Half Length PCIe slot
Dual Processor: (2) PCIe x16 Half Height
Half Length low-profile slots

USB(s)

Rear (2) USB 3.0, Front (2) USB 2.0,
Internal (1) USB 3.0

Video Outputs

(1) VGA Port Front & (1) VGA Port Rear

Remote Management

iDRAC Express

MECHANICAL

Form Factor

1U Rackmount

Power Supply(s)

(2) 550W (100-240VAC) 80 Plus Platinum

Operating Temperature

(Min) 50°F - (Max) 95°F
(Min) 10°C - (Max) 35°C

Operating Humidity

10 to 80% (non-condensing)

Heat Dissipation

1500 Max BTU/hr

Dimensions (WxDxH)

17.08" (434mm) x 28.13" (714.62mm) x
1.68" (42.8mm)

Max. Weight

35.36 lbs. (16.03kg)

Warranty

5-Year, On-site, Next Business Day, Keep Your
Hard Drive Warranty

STORAGE

Hard Drive Bays

(8) 2.5" Hot Swappable Bays
(2 used for the OS)

Hard Drives Supported

PCIe NVMe, SAS & SATA

RAID

RAID 0, 1, 5, 6, 10

RAID Controller

PERC H730P (2GB NV Cache)

Maximum Storage

Up to 160TB